

Handmade *by*
Craftsmen



Dean Stoves

www.dean-forge.co.uk

Dean Forge

Dean Forge was established by Michael Chew in 1969 in the small village of Dean Prior nestling on the edge of Dartmoor.

Robert Herrick, the Royalist poet was vicar of Dean Prior during the 17th Century and the village is still an attraction for many devotees of his work, much of it written at Dean Prior.

In 1978, when Dean Forge first designed and marketed woodburning stoves, the very local nature of this business was reflected in the name of the range – Herrick Stoves.

Dean Forge has always been a family run business. Michael, his sons and other dedicated long standing local members of staff have amassed vast expertise and experience in manufacturing and installing wood and multi-fuel stoves.

All Dean Stoves are manufactured at Dean Forge in Devon with the cast iron door cast in a British foundry.



www.dean-forge.co.uk

The Hembury Range



Hembury 5

The Hembury Range is the latest stove range developed by Dean Stoves.

Based on the successful Clearburn Range the Hembury has the same exceptionally efficient air wash system and now with the larger glass window is able to benefit not only from a clearer view of the fire but a view of the whole fire. With clean lines the Hembury Range will adorn any room, traditional or contemporary.

The Hembury Range of stoves all come with a wood burning plate fitted. This plate enables hot embers to be retained, restricting the air entering the underside of the fire which improves the combustion when burning wood. When burning solid fuel or a mixture of wood and solid fuel together the plate can be easily removed.



Hembury Slimline 5



Hembury 8

Hembury Range features

- Individual Primary and Secondary air controls
- Top and Rear flue outlets
- Fixed multi-fuel grate and ash pan
- Wood burning plate

Hembury Range options

- Rear vertical flue adaptor (Backbox)
- Closed combustion
- Hot water Boiler
- DEFRA kit (for smoke controlled areas, Hembury 5, Slimline 5 & 8)



Stove top corner detail

Hembury 5												
CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	460mm	645mm	330mm	-	-	9,000 BTU	5Kw	125mm	100mm	83%	100mm	500mm

Hembury Slimline 5												
CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	585mm	645mm	315mm	-	-	10,000 BTU	5Kw	125mm	100mm	81.6%	115mm	485mm

Hembury 6												
CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	585mm	645mm	315mm	-	-	10,000 BTU	6.5Kw	150mm	100mm	79.6%	115mm	485mm

Hembury 8												
CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	585mm	645mm	380mm	-	-	10,000 BTU	8Kw	150mm	100mm	76.4%	115mm	485mm

The *Croft Clearburn* Range



The Croft range of Clearburn stoves is designed on simple clean-cut lines and with the added advantage of a flat heating area on top, would grace any home, old or new.

As with all our Clearburn stoves, the substantial double-glazed glass door panel and pre-heat air wash system provide a stove that is more environmentally friendly, burning more of the smoke gases. The Croft Junior, Slimline 5 and Croft Small are approved for use in smoke controlled areas with DEFRA kit fitted.

The Croft Clearburn range has the option of profiled flat top or rolled edge flat top. Standard is with a black bar handle and black secondary air control knob, but can be ordered with cage or stainless steel bar handles and brass or stainless steel secondary air control knob. See illustrations on option pages.

Key features

- 5Kw Nominal
- 83% efficient
- Individual Primary & Secondary air controls
- Top and rear flue outlets

Optional

- Rear flue adaptor (Backbox)
- Multi-kit with riddling grate
- Hot water boiler
- DEFRA kit (for smoke controlled areas)



Junior with rolled edge flat top



Profiled flat top

Croft Clearburn Junior

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	460mm	635mm	345mm	-	-	9,000 BTU	5Kw	125mm	100mm	83%	100mm	485mm
Rolled edge Flat Top	490mm	635mm	345mm	-	-	9,000 BTU	5Kw	125mm	100mm	83%	100mm	485mm

Croft *Small*



Croft Clearburn Small

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	585mm	635mm	390mm	-	18,000 BTU	10,000 BTU	8Kw	150mm	100mm	76.4%	115mm	475mm
Rolled edge Flat Top	622mm	635mm	390mm	-	18,000 BTU	10,000 BTU	8Kw	150mm	100mm	76.4%	115mm	475mm



Croft *Slimline* 5 & 6

The Croft Clearburn Small and Slimline are effectively the same stove, except that the Croft Slimline has a reduced depth. This lowers the KW output but retains the large glass door and wide fire box for maximum view of the fire. Both the Clearburn Small and Slimline 5 are approved to be used in a smoke controlled area with DEFRA kit fitted.



Clearburn Slimline 5

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	585mm	635mm	330mm	-	-	10,000 BTU	5Kw	125mm	100mm	81.6%	103mm	475mm
Rolled edge Flat Top	622mm	635mm	330mm	-	-	10,000 BTU	5Kw	125mm	100mm	81.6%	103mm	475mm

Croft Clearburn Slimline

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	585mm	635mm	325mm	-	-	10,000 BTU	6.5Kw	150mm	100mm	79.6%	115mm	475mm
Rolled edge Flat Top	622mm	635mm	325mm	-	-	10,000 BTU	6.5Kw	150mm	100mm	79.6%	115mm	475mm

Croft *Logstore*

Available in both the Clearburn Junior and the Clearburn Small.

The Logstore is part of the stove, elevating the stove for a better view of the fire and creating a wood store below. Working in exactly the same way as all the Clearburn Range the Logstore Clearburns have an extra heat shield below the fire box for added protection for storage of wood. Approved to be used in a smoke controlled area with DEFRA kit fitted.



Clearburn Small Logstore



Clearburn Junior Logstore

Clearburn Junior Logstore

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	460mm	850mm	345mm	-	-	9,000 BTU	5Kw	125mm	-	83%	100mm	698mm
Rolled edge Flat Top	490mm	850mm	345mm	-	-	9,000 BTU	5Kw	125mm	-	83%	100mm	698mm

Clearburn Small Logstore

Profiled Flat Top	585mm	910mm	390mm	-	18,000 BTU	10,000 BTU	8Kw	150mm	-	76.4%	115mm	745mm
Rolled edge Flat Top	622mm	910mm	390mm	-	18,000 BTU	10,000 BTU	8Kw	150mm	-	76.4%	115mm	745mm

Croft Medium & Large



Croft Medium with rolled edge top



Croft Medium with profile top

The Croft Medium and Croft Large are the largest output stoves in the Clearburn Range with the powerful Clearburn air wash system and the large double glassed door.

Both have the largest range of boiler option from domestic hot water to an integral full central heating boiler.

Croft Clearburn Medium

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	680mm	685mm	490mm	35,000 BTU	25,000 BTU	10,000 BTU	11Kw	150mm	150mm	75.9%	115mm	525mm
Rolled edge Flat Top	700mm	685mm	490mm	35,000 BTU	25,000 BTU	10,000 BTU	11Kw	150mm	150mm	75.9%	115mm	525mm

Croft Clearburn Large

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	725mm	685mm	515mm	37,000 BTU	27,000 BTU	10,000 BTU	12.5Kw	150mm	150mm	72.9%	115mm	525mm
Rolled edge Flat Top	742mm	685mm	515mm	37,000 BTU	27,000 BTU	10,000 BTU	12.5Kw	150mm	150mm	72.9%	115mm	525mm

Dartmoor Stove Range

Dartmoor 5



- Base Protection Plate available, helping to reduce the hearth temperature when fitting onto a non-constructural hearth or onto a heat sensitive hearth material e.g. slate or marble.

Dartmoor 5 features

- The smallest stove from Dean Stoves, yet big on features.
- Powerful Airwash System, designed to create combustion over the glass for a clearer view of the fire helping to clean unwanted deposits from the glass after the fire has been on periods of slumber.
- Woodburner and Multi-fuel models with riddling grate available.
- Kit available to convert the Woodburner model to burn fossil fuels at a later date.
- Rear Heat Protection Plate can be installed, reducing the safe distance to combustible materials, from the rear of the stove.
- Domestic hot water boiler can be installed in the Dartmoor 5, prior to installation.
- **APPROVED** for use in smoke controlled areas with DEFRA kit fitted. *
- Black handle supplied as standard or Stainless Steel option at a small additional cost (see handle options page).



Dartmoor 5

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	430mm	540mm	285mm	-	-	9000 BTU	5Kw	125mm	50mm	82%	100mm	435mm

Dartmoor W5

The Dartmoor W5 model has been developed to provide a wide door 5kw stove. An ideal choice for smaller rooms with larger fireplaces.

Dartmoor W5 features

- Powerful Airwash System.
- Wider Door than the Dartmoor 5, but with same 5kw nominal output.
- Woodburning and Multi-fuel models available.
- **APPROVED** for use in smoke controlled areas with DEFRA kit fitted.
- Kit available to convert the Woodburner model to burn fossil fuels at a later date.
- Rear and Base protection plates not normally required unless the stove is being sited on a heat sensitive hearth material such as Slate or Marble.



Dartmoor W5

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	565mm	640mm	290mm	-	-	9000 BTU	5Kw	125mm	105mm	80.6%	103mm	475mm

Dartmoor 6&8

Dartmoor 6 & 8 features

- Large glass door with all the features of the Dartmoor 5 and W5 models
- Powerful Airwash system, designed to create a clearer view of the fire by creating combustion over the glass.
- Woodburner and Multi-fuel models available.
- Optional kit to convert the Woodburner model to burn fossil fuels at a later date.
- Dartmoor 6 **APPROVED** for use in smoke controlled areas with DEFRA kit fitted.
- Rear and Base protection plates not normally required unless the stove is being sited on a heat sensitive hearth material such as Slate or Marble.
- Boiler Options.


Boiler options are available on all Dartmoor stoves. Please see specification section for full details.

Dartmoor 6

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	565mm	640mm	290mm	-	-	9000 BTU	6.5Kw	150mm	105mm	77.8%	115mm	475mm

Dartmoor 8

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	DOUBLE WRAP	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	565mm	640mm	343mm	-	14600 BTU	9000 BTU	8Kw	150mm	105mm	74.9%	115mm	475mm

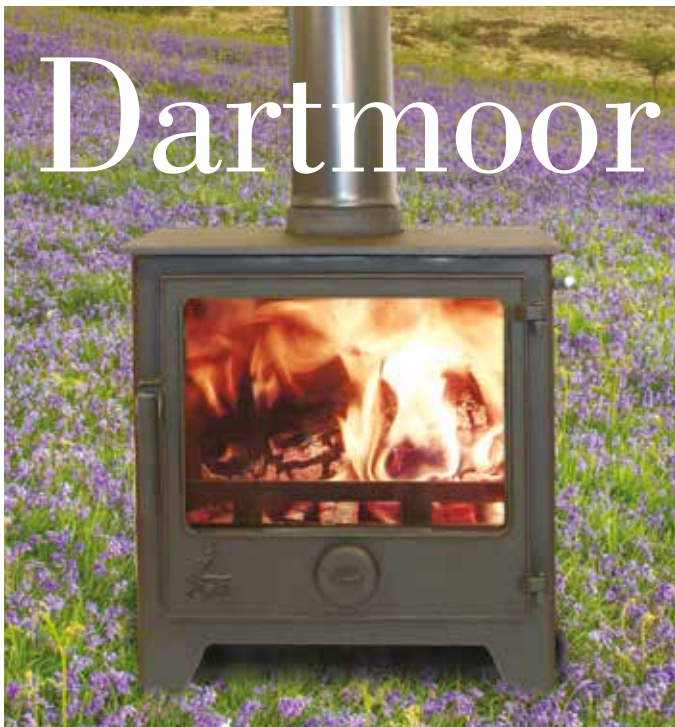

Huccaby and Foxworthy High & Low

As part of the Dartmoor range, the Huccaby and the Foxworthy are named after two local beauty spots here in the Dartmoor National Park.

With solid but elegant legs both the Huccaby and Foxworthy carry all the features of the Dartmoor range with the added advantage of an elevated fire. With the presence of a big stove and with lower output, these stoves are ideal for the larger fireplace within a room size that needs 5kw or less. The Foxworthy also has the option of two different leg lengths.



Huccaby



Foxworthy Low

Huccaby key features

- 5kw nominal output
- Wood burning or Multi-fuel options
- Powerful Airwash System
- Large glass window
- 80.6% efficient
- Approved for use in smoke controlled areas with a DEFRA kit fitted

Foxworthy key features

- 5kw nominal output
- Wood burning or Multi-fuel options
- Powerful Airwash System
- Large glass window
- 82% efficient
- Approved for use in smoke controlled areas with a DEFRA kit fitted



Foxworthy High

Huccaby

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	565mm	785mm	290mm	-	-	9,000 BTU	5Kw	125mm	250mm	80.6%	103mm	620mm

Foxworthy High

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	430mm	790mm	285mm	-	-	9,000 BTU	5Kw	125mm	300mm	82%	103mm	688mm

Foxworthy Low

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	430mm	695mm	285mm	-	-	9,000 BTU	5Kw	125mm	200mm	82%	103mm	588mm

Junior 105Se

The 105Se has had extensive development, now with a fixed multi-fuel grate and separate primary and secondary air controls which give more control when burning wood or smokeless fuel.

With both the primary and secondary air being taken from the base of the stove an external air manifold can easily be installed. This allows you to connect the 105Se's combustion air directly to an outside air duct reducing a possible draught in the room and meeting current building regulations on new houses.*



Junior 105Se High, no lower door

The Junior 105Se incorporates the same, well proven, powerful preheated airwash system as that built in to all our Clearburn Range.



Junior 105Se High with lower door

Key features

- 5Kw nominal output
- 83% efficient
- Low and high stove options
- Multi-Fuel
- Powerful pre-heated airwash system
- DEFRA approved, suitable for smoke controlled areas
- Large curved glass and door (315mm x 355mm)
- 125mm top and rear flue outlets
- Wood burning plate

Optional

- Closed combustion (Direct air inlet facility)
- Optional store door (high model)
- Vertical rear flue adaptor
- Domestic hot water boiler option (installed at manufacturing stage)

* Check with your local building control before installation of direct air.



Junior 105Se Low

Junior 105Se Low

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	450mm	640mm	375mm	-	-	9000 BTU	5Kw	125mm	N/A	83%	100mm	485mm

Junior 105Se High

CANOPY TYPE	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
Profiled Flat Top	450mm	850mm	375mm	-	-	9000 BTU	5Kw	125mm	N/A	83%	100mm	698mm

Inset Range



Incorporating all the features of the Clearburn range, these great little inset woodburning or multifuel stoves have been designed to fit into an existing fireplace, often saving on building works to re-model your existing fireplace and hearth depth.



The pre-heated air wash system, designed to keep the glass clean and secondary burning of exhaust gases, multi-fuel riddling grate option and superb fuel efficiency make these traditional stoves among the most efficient inset stoves available.



Key features

- Incorporating all the features of the Clearburn Range
- Double skin convector
- Preheated airwash system
- Designed to fit into a standard 16" (200mm) fireplace (with fire back removed)
- Handle options. Bar, cage or stainless steel *
- Drop in external riddling multi-fuel grate
- Double glazed heavy cast iron door *
- 5mm steel refractory lined fire box
- 82% efficient
- 5kw nominal output
- 125mm flue outlet

* Croft and Herrick only.

Dartmoor 5 Inset							
CANOPY TYPE	WIDTH	HEIGHT	OVERALL DEPTH	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY
Profiled Flat Top with extra extension frame	495mm	580mm	330mm	5Kw	125mm	-	82%
Profiled Flat Top without extra extension frame	480mm	563mm	330mm	5Kw	125mm	-	82%

Rear Fire Box Overall Dimensions		
WIDTH	HEIGHT	DEPTH
395mm	550mm	257mm
395mm	550mm	257mm

Croft Inset							
CANOPY TYPE	WIDTH	HEIGHT	OVERALL DEPTH	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY
Profiled Flat Top	520mm	563mm	372mm	5Kw	125mm	-	82%

Rear Fire Box Overall Dimensions		
WIDTH	HEIGHT	DEPTH
395mm	550mm	257mm

Herrick Inset							
CANOPY TYPE	WIDTH	HEIGHT	OVERALL DEPTH	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY
Low Canopy	520mm	622mm	372mm	5Kw	125mm	-	82%

Rear Fire Box Overall Dimensions		
WIDTH	HEIGHT	DEPTH
395mm	550mm	257mm




Herrick

Low & High Clearburns

The Herrick Low Clearburn has the advantage of having a tapered canopy but with a flat heating area on top. As with all our Clearburn stoves, the substantial double-glazed stay-clear glass door panel, plus the pre-heated air wash system, provides a stove that is more environmentally friendly, burning more of the smoke gases.

The Herrick High Clearburn stove has an elegant tapering canopy creating balance in the large Inglenook fireplaces and is used widely in a free-standing installation.

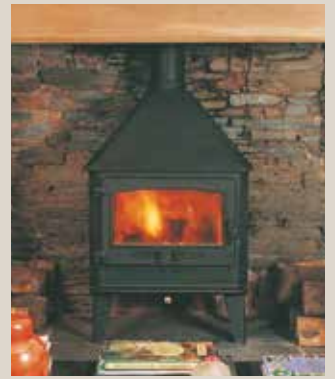

Multi-Fuel grates and three flue options available – see illustrating page

Herrick Low Clearburn

MODEL	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
JUNIOR	485mm	720mm	345mm	–	–	9,000 BTU	5Kw	125mm	100mm	83%	100mm	490mm
SMALL	610mm	765mm	390mm	–	18,000 BTU	10,000 BTU	8Kw	150mm	100mm	76.4%	115mm	475mm
MEDIUM	725mm	820mm	495mm	35,000 BTU	25,000 BTU	10,000 BTU	11Kw	150mm	150mm	75.9%	115mm	525mm
LARGE	775mm	820mm	520mm	37,000 BTU	27,000 BTU	10,000 BTU	12.5Kw	150mm	150mm	72.9%	115mm	525mm

Herrick High Clearburn

MODEL	WIDTH	HEIGHT	DEPTH	INTEGRAL BOILER	SADDLE BOILER	FLAT BACK BOILER	NOMINAL STOVE OUTPUT	FLUE SIZE	STANDARD LEG LENGTH	EFFICIENCY	FLUE CENTRE TOP (A)	FLUE CENTRE (B)
JUNIOR	485mm	825mm	385mm	–	–	9,000 BTU	5Kw	125mm	100mm	83%	100mm	490mm
SMALL	610mm	910mm	390mm	–	18,000 BTU	10,000 BTU	8Kw	150mm	100mm	76.4%	115mm	475mm
MEDIUM	700mm	962mm	495mm	35,000 BTU	25,000 BTU	10,000 BTU	11Kw	150mm	150mm	75.9%	115mm	525mm
LARGE	750mm	962mm	520mm	37,000 BTU	27,000 BTU	10,000 BTU	12.5Kw	150mm	150mm	72.9%	115mm	525mm

* Passed smoke control testing. Awaiting certification.

Door Handles & Control Knob Options

The Clearburn Range of stoves come as standard with a black bar handle and black control knob but also have the option of cage or stainless steel handles and brass or stainless steel secondary air control knob. Although we recommend the use of a glove when operating the stove the cage will stay cooler than the or stainless steel handle. Please state which options you would like when ordering your stove.



Black air control knob



Brass air control knob



Stainless steel knob



Black bar door handle



Cage door handle



Stainless steel handle

Dartmoor 5 Handles

The Dartmoor range stove comes as standard with a black cast handle or can be ordered with a stainless steel handle, at a small additional cost. All special colour stoves will come with a stainless steel handle.



Information & Options

Clear Vision of Fire

Dean Clearburn stoves incorporate a preheated air wash system. This system is designed to heat the secondary air to a very high temperature before being drawn over the glass.

The stove induces pre-heated air from the bottom of the stove through a labyrinth of passages into the top of the stove and over the glazed door, this drives unburnt gases back into the fire chamber mixing with the air at the same time.

These gases combined with the hot air cause combustion over the glass, burning more fuel particles and unwanted deposits off the glass; thus increasing the efficiency and vision of the fire.

Legs

All Junior, Slimline and Small Clearburn stoves are fitted with 100mm legs and all Clearburn stoves in the medium and large ranges are fitted with 150mm legs as standard giving their standard height in the tables.

We are able to offer variation in leg height (at additional cost) from 25mm to 200mm, please state this when ordering your stove.

Airwash System

Both the Hembury and Clearburn range of stoves have airwash systems unlike many other stoves on the market. The secondary air is taken in through the base of the stove where it starts to take on heat; it then continues on a journey through special air ducting inside the stove, where it is heated to a very high temperature before entering the fire box. This superhot air causes combustion over the glass, burning smoke particles and unwanted deposits off the glass.

Flue Options

There are three flue arrangements available – top, rear and back box.


Top and rear options are fitted as standard to all Dean Stoves Clearburn stoves; this is achieved by a moving and interchangeable flue spigot and cover plate to either the top or the back.

The back box (see illustration) is an optional extra, this is fixed to the back outlet on the stove, using the same fixing point as the standard spigot, and enabling the stove to be brought forward in the fireplace and the top kept clear, whilst using a vertical flue. This option also eliminates the use of a tee and cap, with the added facility in most cases to still clean the flue through the stove.

Please note: cleaning the flue through the stove is not always possible with saddle and integral boilers.



Optional back box arrangement
(Vertical rear flue adaptor)

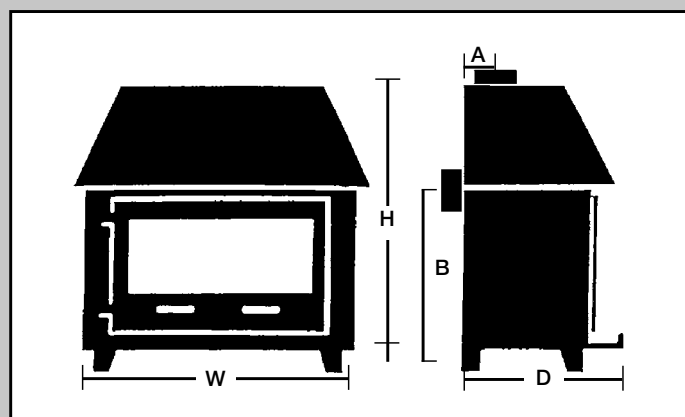

Multi-Fuel Grates Option

The full range of Clearburn stoves can be fitted with a multi-fuel coal grate. The Junior, Slimline and Small can be fitted with a grate system where you can riddle the ash through to an ash pan via an external riddling arm. The Medium, Large and Double-sided stoves have a static grate system. The Hembury Range are all fitted with a multi-fuel grate as standard.

Hearth Requirements and Stove Installation

All Dean Stoves and the Dartmoor 5 with the base protector can be sited on a minimum of 12mm of non combustible hearth to meet current building regulations. Please refer to installation instructions and current building regulations before installing your stove.

Dean Stoves recommend all stove installations are carried out by an experienced HETAS qualified engineer.

Stove Finish

Stoves are finished with a high quality heat resistant paint. Flat black is our standard colour for all of our stoves.

Boilers

All stoves can be fitted (at manufacturing stage) with boiler options from small domestic boilers (9000 BTU) up to a maximum as stated in the table for the particular stove.

The Clearburn medium and large stoves can be fitted with high capacity integral boilers, capable of running a central heating system. As with all stoves the glass cleaning efficiency of the air wash system is often affected when a boiler is installed.

Fuel

All stoves will burn wood, peat and brickettes. Stoves fitted with multi-fuel grates will burn all types of smokeless fuel recommended for enclosed appliances.

As with all woodburning stoves the wood you burn must have a moisture content of less than 20%. It is imperative the wood you use should have at least one year's air drying in a covered position before use on any stove for maximum efficiency.

Closed Combustion (Woodburning only)

The Clearburn Range (wood burning only), Hembury and 105Se (wood and multi-fuel) can be fitted with a direct air manifold enabling combustion air to be connected directly to an outside air source.

By using the Closed Combustion system you prevent the stove from stealing heat from the room thus maximising the heat efficiency of the stove.

The Closed Combustion manifold fits neatly to the underside of a standard or long legged Clearburn stove.

To calculate heat requirement for your room

A good rule of thumb guide to calculate the heat requirement of a given room is: HEIGHT X WIDTH X DEPTH (in feet) divided by 500 (for metres divide by 14)

This gives you the kilowatt requirement. Multiply this result by 3,400 to get the BTU's requirement.

This is based on average house insulation with room temperatures of 20°C and an ambient temperature of -1°C.

Well-insulated houses could replace the division of 500 with 650.

Distance to combustibles (mm)

Stove	Rear of Stove	Side of Stove	With rear heat shield
Hembury 5	700	600	-
Clearburn Junior	700	600	-
Junior Logstore	700	600	-
Junior 105Se	700	600	-
Hembury Slimline 5	500	1000	400
Clearburn Slimline 5	500	1000	400
Hembury 6	850	700	-
Clearburn Slimline 6	850	700	-
Hembury 8	850	700	-
Clearburn Small	850	700	-
Clearburn Small Logstore	850	700	-
Clearburn Medium	1000	700	-
Clearburn Large	1200	800	-
Dartmoor 5	950	750	500
Foxworthy	950	750	500
Dartmoor W5	900	600	475
Dartmoor 6	900	600	475
Huccaby	900	600	475
Dartmoor 8	900	600	475

Croft Clearburn Top Options

All Croft Clearburn stoves have the option of a profiled flat top or a rolled edge flat top. As with all the Clearburn range, options of cage or bar door handles and black or brass secondary air control knobs are available. See illustration page.



Croft Clearburn Junior
with profile top



Croft Clearburn Junior
with rolled edge top

Available colours



Aubergine



Grey



Champagne



Charcoal



Dory Blue



Firecracker Red



Honey Glow Brown



Mushroom

Due to the limitations of the print process actual colours may vary. Stoves in this brochure photographed on Dartmoor may appear lighter due to the outdoor lighting conditions.

Dean Stoves would like to thank Mrs Cullen and the Leighon estate for their kind permission to photograph the stoves at Hound Tor, Dartmoor.



Dean Forge



Dean Forge Fabrications Ltd

Dean Prior, Buckfastleigh,
Devon TQ11 0LS

Telephone: 01364 643574

Facsimile: 01364 643982

Email: stoves@dean-forge.co.uk

Dean Stoves has a policy of continuous development and reserve the right to change the specification on the stoves without further notice.

Dealer's Stamp

www.dean-forge.co.uk